




nets may be used for light cargo $\geq 2''$ mesh or standard polypropylene yacht "trampoline" fabric

6(or more) horsepower long shaft outboard on retractable pivoting mount—both motor and mount removable when not required, stow under foredeck.

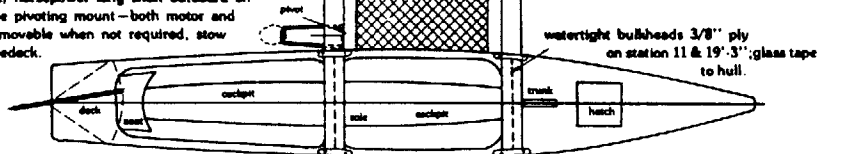

2-8' oars may be effectively used from the aft cockpit for short distances

hull/aka attachments $5/8''$ dia. galv. bolts through $1'' \times 3'' \times 20''$ oak cleats on top similar reinforcing under outboard sheer clamps

MAST fir, hollow $7''$ square at deck, taper to $4''$ dia at top, $29'$ long
GAFF fir, solid, $1\frac{1}{2}'' \times 2\frac{1}{4}''$ tapered to $1\frac{3}{4}''$ at tip

SAIL hoist foot leach top peak-clew large rig

main $19'-6''$ $12'-0''$ $20'-7''$ $8'-2''$ $22'-6''$
jib $21'-6''$ $11'-4''$ $19'-3''$

all cordage $3/8''$ dia Dacron, 3 strand

