

# Reinforced concrete

From Wikipedia, the free encyclopedia

**Reinforced concrete** (RC) is a composite material in which concrete's relatively low tensile strength and ductility are counteracted by the inclusion of reinforcement having higher tensile strength or ductility. The reinforcement is usually, though not necessarily, steel reinforcing bars (rebar) and is usually embedded passively in the concrete before the concrete sets. Reinforcing schemes are generally designed to resist tensile stresses in particular regions of the concrete that might cause unacceptable cracking and/or structural failure. Modern reinforced concrete can contain varied reinforcing materials made of steel, polymers or alternate composite material in conjunction with rebar or not. Reinforced concrete may also be permanently stressed (in compression), so as to improve the behaviour of the final structure under working loads. In the United States, the most common methods of doing this are known as pre-tensioning and post-tensioning.



The novel shape of the Philips Pavilion was allowed by reinforced concrete.

For a strong, ductile and durable construction the reinforcement needs to have the following properties at least:

- High relative strength
- High toleration of tensile strain
- Good bond to the concrete, irrespective of pH, moisture, and similar factors
- Thermal compatibility, not causing unacceptable stresses in response to changing temperatures.
- Durability in the concrete environment, irrespective of corrosion or sustained stress for example.

## Contents

- 1 History
- 2 Use in construction
- 3 Behavior of reinforced concrete
  - 3.1 Materials
  - 3.2 Key characteristics
  - 3.3 Mechanism of composite action of reinforcement and concrete
  - 3.4 Anchorage (bond) in concrete: Codes of specifications
  - 3.5 Anti-corrosion measures
- 4 Reinforcement and terminology of beams
- 5 Prestressed concrete
- 6 Common failure modes of steel reinforced concrete
  - 6.1 Mechanical failure
  - 6.2 Carbonation

- 6.3 Chlorides
- 6.4 Alkali silica reaction
- 6.5 Conversion of high alumina cement
- 6.6 Sulphates
- 7 Steel plate construction
- 8 Fiber-reinforced concrete
- 9 Non-steel reinforcement
- 10 See also
- 11 References
  - 11.1 Further reading
- 12 External links

## History

François Coignet was a French industrialist of the nineteenth century, a pioneer in the development of structural, prefabricated and reinforced concrete.<sup>[1]</sup> Coignet was the first to use iron-reinforced concrete as a technique for constructing building structures.<sup>[2]</sup> In 1853 Coignet built the first iron reinforced concrete structure, a four story house at 72 rue Charles Michels in the suburbs of Paris.<sup>[2]</sup> Coignet's descriptions of reinforcing concrete suggests that he did not do it for means of adding strength to the concrete but for keeping walls in monolithic construction from overturning.<sup>[3]</sup> In 1854, English builder William B. Wilkinson reinforced the concrete roof and floors in the two-storey house he was constructing. His positioning of the reinforcement demonstrated that, unlike his predecessors, he had knowledge of tensile stresses.<sup>[4][5][6]</sup>

Joseph Monier, a French gardener and known to be one of the principal inventors of reinforced concrete, was granted a patent for reinforced flowerpots by means of mixing a wire mesh to a mortar shell. In 1877, Monier was granted another patent for a more advanced technique of reinforcing concrete columns and girders with iron rods placed in a grid pattern. Though Monier undoubtedly knew reinforcing concrete would improve its inner cohesion, it is less known if he even knew how much reinforcing actually improved concrete's tensile strength.<sup>[7]</sup>

Before 1877 the use of concrete construction, though dating back to the Roman Empire and reintroduced in the mid to late 1800s, was not yet a proven scientific technology. American New Yorker Thaddeus Hyatt published a report titled *An Account of Some Experiments with Portland-Cement-Concrete Combined with Iron as a Building Material, with Reference to Economy of Metal in Construction and for Security against Fire in the Making of Roofs, Floors, and Walking Surfaces* where he stated his experiments on the behavior of reinforced concrete. His work played a major role in the evolution of concrete construction as a proven and studied science. Without Hyatt's work, more dangerous trial and error methods would have largely been depended on for the advancement in the technology.<sup>[3][8]</sup>

G. A. Wayss was a German civil engineer and a pioneer of the iron and steel concrete construction. In 1879 Wayss bought the German rights to Monier's patents and in 1884 started the first commercial use for reinforced concrete in his firm Wayss & Freytag. Up until the 1890s Wayss and his firm greatly contributed to the advancement of Monier's system of reinforcing and established it as a well-developed scientific technology.<sup>[9]</sup>

Ernest L. Ransome was an English-born engineer and early innovator of the reinforced concrete techniques in the end of the 19th century. With the knowledge of reinforced concrete developed during the previous 50 years, Ransome innovated nearly all styles and techniques of the previous known inventors of reinforced concrete. Ransome's key innovation was to twist the reinforcing steel bar improving bonding with the concrete.<sup>[10]</sup> Gaining increasing fame from his concrete constructed buildings Ransome was able to build two of the first reinforced concrete bridges in North America.<sup>[11]</sup> One of the first concrete buildings constructed in the United States, was a private home, designed by William Ward in 1871. The home was designed to be fireproof for his wife. One of the first skyscrapers made with reinforced concrete was the 16-storey Ingalls Building in Cincinnati, constructed in 1904.<sup>[12]</sup>

## Use in construction

Many different types of structures and components of structures can be built using reinforced concrete including slabs, walls, beams, columns, foundations, frames and more.

Reinforced concrete can be classified as precast or cast-in-place concrete.

Designing and implementing the most efficient floor system is key to creating optimal building structures. Small changes in the design of a floor system can have significant impact on material costs, construction schedule, ultimate strength, operating costs, occupancy levels and end use of a building.



Rebars of Sagrada Família's roof in construction (2009)

Without reinforcement, constructing modern structures with concrete material would not be possible.

## Behavior of reinforced concrete

### Materials

Concrete is a mixture of coarse (stone or brick chips) and fine (generally sand or crushed stone) aggregates with a paste of binder material (usually Portland cement) and water. When cement is mixed with a small amount of water, it hydrates to form microscopic opaque crystal lattices encapsulating and locking the aggregate into a rigid structure. The aggregates used for making concrete should be free from harmful substances like organic impurities, silt, clay, lignite etc. Typical concrete mixes have high resistance to compressive stresses (about 4,000 psi (28 MPa)); however, any appreciable tension (*e.g.*, due to bending) will break the microscopic rigid lattice, resulting in cracking and separation of the concrete. For this reason, typical non-reinforced concrete must be well supported to prevent the development of tension.

If a material with high strength in tension, such as steel, is placed in concrete, then the composite material, reinforced concrete, resists not only compression but also bending and other direct tensile actions. A reinforced concrete section where the concrete resists the compression and steel resists the tension can be made into almost any shape and size for the construction industry.

## Key characteristics

Three physical characteristics give reinforced concrete its special properties:

1. The coefficient of thermal expansion of concrete is similar to that of steel, eliminating large internal stresses due to differences in thermal expansion or contraction.
2. When the cement paste within the concrete hardens, this conforms to the surface details of the steel, permitting any stress to be transmitted efficiently between the different materials. Usually steel bars are roughened or corrugated to further improve the bond or cohesion between the concrete and steel.
3. The alkaline chemical environment provided by the alkali reserve (KOH, NaOH) and the portlandite (calcium hydroxide) contained in the hardened cement paste causes a passivating film to form on the surface of the steel, making it much more resistant to corrosion than it would be in neutral or acidic conditions. When the cement paste is exposed to the air and meteoric water reacts with the atmospheric CO<sub>2</sub>, portlandite and the calcium silicate hydrate (CSH) of the hardened cement paste become progressively carbonated and the high pH gradually decreases from 13.5 – 12.5 to 8.5, the pH of water in equilibrium with calcite (calcium carbonate) and the steel is no longer passivated.

As a rule of thumb, only to give an idea on orders of magnitude, steel is protected at pH above ~11 but starts to corrode below ~10 depending on steel characteristics and local physico-chemical conditions when concrete becomes carbonated. carbonatation of concrete along with chloride ingress are amongst the chief reasons for the failure of reinforcement bars in concrete.<sup>[13]</sup>

The relative cross-sectional area of steel required for typical reinforced concrete is usually quite small and varies from 1% for most beams and slabs to 6% for some columns. Reinforcing bars are normally round in cross-section and vary in diameter. Reinforced concrete structures sometimes have provisions such as ventilated hollow cores to control their moisture & humidity.

Distribution of concrete (in spite of reinforcement) strength characteristics along the cross-section of vertical reinforced concrete elements is inhomogeneous.<sup>[14]</sup>

## Mechanism of composite action of reinforcement and concrete

The reinforcement in a RC structure, such as a steel bar, has to undergo the same strain or deformation as the surrounding concrete in order to prevent discontinuity, slip or separation of the two materials under load. Maintaining composite action requires transfer of load between the concrete and steel. The direct stress is transferred from the concrete to the bar interface so as to change the tensile stress in the reinforcing bar along its length, this load transfer is achieved by means of bond (anchorage) and is idealized as a continuous stress field that develops in the vicinity of the steel-concrete interface.

### Anchorage (bond) in concrete: Codes of specifications

Because the actual bond stress varies along the length of a bar anchored in a zone of tension, current international codes of specifications use the concept of development length rather than bond stress. The main requirement for safety against bond failure is to provide a sufficient extension of the length of the bar beyond the point where the steel is required to develop its yield stress and this length must be at least equal to its development length. However, if the actual available length is inadequate for full development, special anchorages must be provided, such as cogs or hooks or mechanical end plates. The same concept applies to lap splice length mentioned in the codes where splices (overlapping) provided between two adjacent bars in order to maintain the required continuity of stress in the splice zone.

### Anti-corrosion measures

In wet and cold climates, reinforced concrete for roads, bridges, parking structures and other structures that may be exposed to deicing salt may benefit from use of corrosion-resistant reinforcement such as uncoated, low carbon/chromium (micro composite), epoxy-coated, hot dip galvanised or stainless steel rebar. Good design and a well-chosen concrete mix will provide additional protection for many applications. Uncoated, low carbon/chromium rebar looks similar to standard carbon steel rebar due to its lack of a coating; its highly corrosion-resistant features are inherent in the steel microstructure. It can be identified by the unique ASTM specified mill marking on its smooth, dark charcoal finish. Epoxy coated rebar can easily be identified by the light green colour of its epoxy coating. Hot dip galvanized rebar may be bright or dull grey depending on length of exposure, and stainless rebar exhibits a typical white metallic sheen that is readily distinguishable from carbon steel reinforcing bar. Reference ASTM standard specifications **A1035/A1035M** Standard Specification for Deformed and Plain Low-carbon, Chromium, Steel Bars for Concrete Reinforcement, **A767** Standard Specification for Hot Dip Galvanized Reinforcing Bars, **A775** Standard Specification for Epoxy Coated Steel Reinforcing Bars and **A955** Standard Specification for Deformed and Plain Stainless Bars for Concrete Reinforcement.

Another, cheaper way of protecting rebars is coating them with zinc phosphate.<sup>[15]</sup> Zinc phosphate slowly reacts with calcium cations and the hydroxyl anions present in the cement pore water and forms a stable hydroxyapatite layer.



A heavy reinforced concrete column, seen before and after the concrete has been cast in place around the rebar cage.

Penetrating sealants typically must be applied some time after curing. Sealants include paint, plastic foams, films and aluminum foil, felts or fabric mats sealed with tar, and layers of bentonite clay, sometimes used to seal roadbeds.

Corrosion inhibitors, such as calcium nitrite [ $\text{Ca}(\text{NO}_2)_2$ ], can also be added to the water mix before pouring concrete. Generally, 1–2 wt. % of [ $\text{Ca}(\text{NO}_2)_2$ ] with respect to cement weight is needed to prevent corrosion of the rebars. The nitrite anion is a mild oxidizer that oxidizes the soluble and mobile ferrous ions ( $\text{Fe}^{2+}$ ) present at the surface of the corroding steel and causes them to precipitate as an insoluble ferric hydroxide ( $\text{Fe}(\text{OH})_3$ ). This causes the passivation of steel at the anodic oxidation sites. Nitrite is a much more active corrosion inhibitor than nitrate, which is a less powerful oxidizer of the divalent iron.

## Reinforcement and terminology of beams

A beam bends under bending moment, resulting in a small curvature. At the outer face (tensile face) of the curvature the concrete experiences tensile stress, while at the inner face (compressive face) it experiences compressive stress.

A **singly reinforced** beam is one in which the concrete element is only reinforced near the tensile face and the reinforcement, called tension steel, is designed to resist the tension.

A **doubly reinforced** beam is one in which besides the tensile reinforcement the concrete element is also reinforced near the compressive face to help the concrete resist compression. The latter reinforcement is called compression steel. When the compression zone of a concrete is inadequate to resist the compressive moment (positive moment), extra reinforcement has to be provided if the architect limits the dimensions of the section.

An **under-reinforced** beam is one in which the tension capacity of the tensile reinforcement is smaller than the combined compression capacity of the concrete and the compression steel (under-reinforced at tensile face). When the reinforced concrete element is subject to increasing bending moment, the tension steel yields while the concrete does not reach its ultimate failure condition. As the tension steel yields and stretches, an "under-reinforced" concrete also yields in a ductile manner, exhibiting a large deformation and warning before its ultimate failure. In this case the yield stress of the steel governs the design.

An **over-reinforced** beam is one in which the tension capacity of the tension steel is greater than the combined compression capacity of the concrete and the compression steel (over-reinforced at tensile face). So the "over-reinforced concrete" beam fails by crushing of the compressive-zone concrete and before the tension zone steel yields, which does not provide any warning before failure as the failure is instantaneous.



Rebar constructed to properly reinforce a beam element, awaiting concrete to be poured.

A **balanced-reinforced** beam is one in which both the compressive and tensile zones reach yielding at the same imposed load on the beam, and the concrete will crush and the tensile steel will yield at the same time. This design criterion is however as risky as over-reinforced concrete, because failure is sudden as the concrete crushes at the same time of the tensile steel yields, which gives a very little warning of distress in tension failure.<sup>[16]</sup>

Steel-reinforced concrete moment-carrying elements should normally be designed to be under-reinforced so that users of the structure will receive warning of impending collapse.

The **characteristic strength** is the strength of a material where less than 5% of the specimen shows lower strength.

The **design strength** or **nominal strength** is the strength of a material, including a material-safety factor. The value of the safety factor generally ranges from 0.75 to 0.85 in Permissible stress design.

The **ultimate limit state** is the theoretical failure point with a certain probability. It is stated under factored loads and factored resistances.

Reinforced concrete structures are normally designed according to rules and regulations or recommendation of a code such as ACI-318, CEB, Eurocode 2 or the like. WSD, USD or LRFD methods are used in design of RC structural members. Analysis and design of RC members can be carried out by using linear or non-linear approaches. When applying safety factors, building codes normally propose linear approaches, but for some cases non-linear approaches. To see the examples of a non-linear numerical simulation and calculation visit the references.<sup>[17][18]</sup>

## Prestressed concrete

Prestressing concrete is a technique that greatly increases the load-bearing strength of concrete beams. The reinforcing steel in the bottom part of the beam, which will be subjected to tensile forces when in service, is placed in tension before the concrete is poured around it. Once the concrete has hardened, the tension on the reinforcing steel is released, placing a built-in compressive force on the concrete. When loads are applied, the reinforcing steel takes on more stress and the compressive force in the concrete is reduced, but does not become a tensile force. Since the concrete is always under compression, it is less subject to cracking and failure.

## Common failure modes of steel reinforced concrete

Reinforced concrete can fail due to inadequate strength, leading to mechanical failure, or due to a reduction in its durability. Corrosion and freeze/thaw cycles may damage poorly designed or constructed reinforced concrete. When rebar corrodes, the oxidation products (rust) expand and tends to flake, cracking the concrete and unbonding the rebar from the concrete. Typical mechanisms leading to durability problems are discussed below.


### Mechanical failure

Cracking of the concrete section is nearly impossible to prevent; however, the size and location of cracks can be limited and controlled by appropriate reinforcement, control joints, curing methodology and concrete mix design. Cracking can allow moisture to penetrate and corrode the reinforcement. This is a serviceability failure in limit state design. Cracking is normally the result of an inadequate quantity of rebar, or rebar spaced at too great a distance. The concrete then cracks either under excess loading, or due to internal effects such as early thermal shrinkage while it cures.

Ultimate failure leading to collapse can be caused by crushing the concrete, which occurs when compressive stresses exceed its strength, by yielding or failure of the rebar when bending or shear stresses exceed the strength of the reinforcement, or by bond failure between the concrete and the rebar.

[19]

## Carbonation

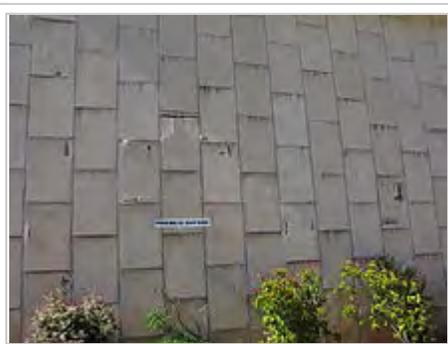

Concrete wall cracking as steel reinforcing corrodes and swells. Rust has a lower density than metal, so it expands as it forms, cracking the decorative cladding off the wall as well as damaging the structural concrete. The breakage of material from a surface is called *spalling*.

Carbonation, or neutralisation, is a chemical reaction between carbon dioxide in the air and calcium hydroxide and hydrated calcium silicate in the concrete.

When a concrete structure is designed, it is usual to specify the concrete cover for the rebar (the depth of the rebar within the object). The minimum concrete cover is normally regulated by design or building codes. If the reinforcement is too close to the surface, early failure due to corrosion may occur. The concrete cover depth can be measured with a cover meter. However, carbonated concrete incurs a durability problem only when there is also sufficient moisture and oxygen to cause electrochemical corrosion of the reinforcing steel.

One method of testing a structure for carbonation is to drill a fresh hole in the surface and then treat the cut surface with phenolphthalein indicator solution. This solution turns pink when in contact with alkaline concrete, making it possible to see the depth of carbonation. Using an existing hole does not suffice because the exposed surface will already be carbonated.

## Chlorides

Chlorides, including sodium chloride, can promote the corrosion of embedded steel rebar if present in sufficiently high concentration. Chloride anions induce both localized corrosion (pitting corrosion) and generalized corrosion of steel reinforcements. For this reason, one should only use fresh raw water or potable water for mixing concrete, ensure that the coarse and fine aggregates do not contain chlorides, rather than admixtures which might contain chlorides.

It was once common for calcium chloride to be used as an admixture to promote rapid set-up of the concrete. It was also mistakenly believed that it would prevent freezing. However, this practice fell into disfavor once the deleterious effects of chlorides became known. It should be avoided whenever possible.



Detailed view of spalling probably caused by a too thin layer of concrete between the steel and the surface, accompanied by corrosion from external exposure

The use of de-icing salts on roadways, used to lower the freezing point of water, is probably one of the primary causes of premature failure of reinforced or prestressed concrete bridge decks, roadways, and parking garages. The use of epoxy-coated reinforcing bars and the application of cathodic protection has mitigated this problem to some extent. Also FRP (fiber-reinforced polymer) rebars are known to be less susceptible to chlorides. Properly designed concrete mixtures that have been allowed to

effectively impervious to the effects of de-icers.

Another important source of chloride ions is sea water. Sea water contains by weight approximately 3.5 wt.% salts. These salts include sodium chloride, magnesium sulfate, calcium sulfate, and bicarbonates. In water these salts dissociate in free ions ( $\text{Na}^+$ ,  $\text{Mg}^{2+}$ ,  $\text{Cl}^-$ ,  $\text{SO}_4^{2-}$ ,  $\text{HCO}_3^-$ ) and migrate with the water into the capillaries of the concrete. Chloride ions, which make up about 50% of these ions, are particularly aggressive as a cause of corrosion of carbon steel reinforcement bars.

In the 1960s and 1970s it was also relatively common for magnesite, a chloride rich carbonate mineral, to be used as a floor-topping material. This was done principally as a levelling and sound attenuating layer. However it is now known that when these materials come into contact with moisture they produce a weak solution of hydrochloric acid due to the presence of chlorides in the magnesite. Over a period of time (typically decades) the solution causes corrosion of the embedded steel rebars. This was most commonly found in wet areas or areas repeatedly exposed to moisture.

### Alkali silica reaction

This a reaction of amorphous silica (chalcedony, chert, siliceous limestone) sometimes present in the aggregates with the hydroxyl ions ( $\text{OH}^-$ ) from the cement pore solution. Poorly crystallized silica ( $\text{SiO}_2$ ) dissolves and dissociates at high pH (12.5 - 13.5) in alkaline water. The soluble dissociated silicic acid



Rebar for foundations and walls of a sewage pump station.



The Paulins Kill Viaduct, Hainesburg, New Jersey, is 115 feet (35 m) tall and 1,100 feet (335 m) long, and was heralded as the largest reinforced concrete structure in the world when it was completed in 1910 as part of the Lackawanna Cut-Off rail line project. The Lackawanna Railroad was a pioneer in the use of reinforced concrete.

reacts in the porewater with the calcium hydroxide (portlandite) present in the cement paste to form an expansive calcium silicate hydrate (CSH). The alkali–silica reaction (ASR) causes localised swelling responsible for tensile stress and cracking. The conditions required for alkali silica reaction are threefold: (1) aggregate containing an alkali-reactive constituent (amorphous silica), (2) sufficient availability of hydroxyl ions ( $\text{OH}^-$ ), and (3) sufficient moisture, above 75% relative humidity (RH) within the concrete.<sup>[20][21]</sup> This phenomenon is sometimes popularly referred to as "concrete cancer". This reaction occurs independently of the presence of rebars; massive concrete structures such as dams can be affected.

## Conversion of high alumina cement

Resistant to weak acids and especially sulfates, this cement cures quickly and has very high durability and strength. It was frequently used after World War II to make precast concrete objects. However, it can lose strength with heat or time (conversion), especially when not properly cured. After the collapse of three roofs made of prestressed concrete beams using high alumina cement, this cement was banned in the UK in 1976. Subsequent inquiries into the matter showed that the beams were improperly manufactured, but the ban remained.<sup>[22]</sup>

## Sulphates

Sulfates ( $\text{SO}_4$ ) in the soil or in groundwater, in sufficient concentration, can react with the Portland cement in concrete causing the formation of expansive products, e.g., ettringite or thaumasite, which can lead to early failure of the structure. The most typical attack of this type is on concrete slabs and foundation walls at grades where the sulfate ion, via alternate wetting and drying, can increase in concentration. As the concentration increases, the attack on the Portland cement can begin. For buried structures such as pipe, this type of attack is much rarer, especially in the eastern United States. The sulfate ion concentration increases much slower in the soil mass and is especially dependent upon the initial amount of sulfates in the native soil. A chemical analysis of soil borings to check for the presence of sulfates should be undertaken during the design phase of any project involving concrete in contact with the native soil. If the concentrations are found to be aggressive, various protective coatings can be applied. Also, in the US ASTM C150 Type 5 Portland cement can be used in the mix. This type of cement is designed to be particularly resistant to a sulfate attack.

## Steel plate construction

In steel plate construction, stringers join parallel steel plates. The plate assemblies are fabricated off site, and welded together on-site to form steel walls connected by stringers. The walls become the form into which concrete is poured. Steel plate construction speeds reinforced concrete construction by cutting out the time-consuming on-site manual steps of tying rebar and building forms. The method results in excellent strength because the steel is on the outside, where tensile forces are often greatest.

## Fiber-reinforced concrete

Fiber reinforcement is mainly used in shotcrete, but can also be used in normal concrete. Fiber-reinforced normal concrete is mostly used for on-ground floors and pavements, but can be considered for a wide range of construction parts (beams, pillars, foundations, etc.), either alone or with hand-tied rebars.

Concrete reinforced with fibers (which are usually steel, glass, or plastic fibers) is less expensive than hand-tied rebar, while still increasing the tensile strength many times. The shape, dimension, and length of the fiber are important. A thin and short fiber, for example short, hair-shaped glass fiber, is only effective during the first hours after pouring the concrete (its function is to reduce cracking while the concrete is stiffening), but it will not increase the concrete tensile strength. A normal-size fiber for European shotcrete (1 mm diameter, 45 mm length—steel or plastic) will increase the concrete's tensile strength.

Steel is the strongest commonly available fiber, and comes in different lengths (30 to 80 mm in Europe) and shapes (end-hooks). Steel fibers can only be used on surfaces that can tolerate or avoid corrosion and rust stains. In some cases, a steel-fiber surface is faced with other materials.

Glass fiber is inexpensive and corrosion-proof, but not as ductile as steel. Recently, spun basalt fiber, long available in Eastern Europe, has become available in the U.S. and Western Europe. Basalt fibre is stronger and less expensive than glass, but historically has not resisted the alkaline environment of Portland cement well enough to be used as direct reinforcement. New materials use plastic binders to isolate the basalt fiber from the cement.

The premium fibers are graphite-reinforced plastic fibers, which are nearly as strong as steel, lighter in weight, and corrosion-proof. Some experiments have had promising early results with carbon nanotubes, but the material is still far too expensive for any building.

## Non-steel reinforcement

There is considerable overlap between the subjects of non-steel reinforcement and fiber-reinforcement of concrete. The introduction of non-steel reinforcement of concrete is relatively recent; it takes two major forms: non-metallic rebar rods, and non-steel (usually also non-metallic) fibres incorporated into the cement matrix. For example, there is increasing interest in glass fiber reinforced concrete (GFRC) and in various applications of polymer fibres incorporated into concrete. Although currently there is not much suggestion that such materials will in general replace metal rebar, some of them have major advantages in specific applications, and there also are new applications in which metal rebar simply is not an option. However, the design and application of non-steel reinforcing is fraught with challenges. For one thing, concrete is a highly alkaline environment, in which many materials, including most kinds of glass, have a poor service life. Also, the behaviour of such reinforcing materials differs from the behaviour of metals, for instance in terms of shear strength, creep and elasticity.<sup>[23][24]</sup>

Fibre-reinforced plastic/polymer (FRP) and glass-reinforced plastic (GRP) consist of fibres of polymer, glass, carbon, aramid or other polymers or high-strength fibres set in a resin matrix to form a rebar rod, or grid, or fibres. These rebars are installed in much the same manner as steel rebars. The cost is higher but, suitably applied, the structures have advantages, in particular a dramatic reduction in problems related to corrosion, either by intrinsic concrete alkalinity or by external corrosive fluids that might

penetrate the concrete. These structures can be significantly lighter and usually have a longer service life. The cost of these materials has dropped dramatically since their widespread adoption in the aerospace industry and by the military.

In particular, FRP rods are useful for structures where the presence of steel would not be acceptable. For example, MRI machines have huge magnets, and accordingly require non-magnetic buildings. Again, toll booths that read radio tags need reinforced concrete that is transparent to radio waves. Also, where the design life of the concrete structure is more important than its initial costs, non-steel reinforcing often has its advantages where corrosion of reinforcing steel is a major cause of failure. In such situations corrosion-proof reinforcing can extend a structure's life substantially, for example in the intertidal zone. FRP rods may also be useful in situations where it is likely that the concrete structure may be compromised in future years, for example the edges of balconies when balustrades are replaced, and bathroom floors in multi-story construction where the service life of the floor structure is likely to be many times the service life of the waterproofing building membrane.

Plastic reinforcement often is stronger, or at least has a better strength to weight ratio than reinforcing steels. Also, because it resists corrosion, it does not need a protective concrete cover as thick as steel reinforcement does (typically 30 to 50 mm or more). FRP-reinforced structures therefore can be lighter and last longer. Accordingly, for some applications the whole-life cost will be price-competitive with steel-reinforced concrete.

The material properties of FRP or GRP bars differ markedly from steel, so there are differences in the design considerations. FRP or GRP bars have relatively higher tensile strength but lower stiffness, so that deflections are likely to be higher than for equivalent steel-reinforced units. Structures with internal FRP reinforcement typically have an elastic deformability comparable to the plastic deformability (ductility) of steel reinforced structures. Failure in either case is more likely to occur by compression of the concrete than by rupture of the reinforcement. Deflection is always a major design consideration for reinforced concrete. Deflection limits are set to ensure that crack widths in steel-reinforced concrete are controlled to prevent water, air or other aggressive substances reaching the steel and causing corrosion. For FRP-reinforced concrete, aesthetics and possibly water-tightness will be the limiting criteria for crack width control. FRP rods also have relatively lower compressive strengths than steel rebar, and accordingly require different design approaches for reinforced concrete columns.

One drawback to the use of FRP reinforcement is their limited fire resistance. Where fire safety is a consideration, structures employing FRP have to maintain their strength and the anchoring of the forces at temperatures to be expected in the event of fire. For purposes of fireproofing an adequate thickness of cement concrete cover or protective cladding is necessary. The addition of 1 kg/m<sup>3</sup> of polypropylene fibers to concrete has been shown to reduce spalling during a simulated fire.<sup>[25]</sup> (The improvement is thought to be due to the formation of pathways out of the bulk of the concrete, allowing steam pressure to dissipate.<sup>[25]</sup>)

Another problem is the effectiveness of shear reinforcement. FRP rebar stirrups formed by bending before hardening generally perform relatively poorly in comparison to steel stirrups or to structures with straight fibres. When strained, the zone between the straight and curved regions are subject to strong bending, shear, and longitudinal stresses. Special design techniques are necessary to deal with such problems.

There is growing interest in applying external reinforcement to existing structures using advanced materials such as composite (fiberglass, basalt, carbon) rebar, which can impart exceptional strength. Worldwide there are a number of brands of composite rebar recognized by different countries, such as Aslan, DACOT, V-rod, and ComBar. The number of projects using composite rebar increases day by day around the world, in countries ranging from USA, Russia, and South Korea to Germany.

## See also

- Concrete cover
- Concrete slab
- Cover Meter
- Falsework
- Ferrocement
- Formwork
- Kahn System
- Precast concrete
- Types of concrete
- Structural robustness

## References

1. Day, p. 284
2. "Francois Coignet - French house builder". Retrieved 23 December 2016.
3. Condit, Carl W. (January 1968). "Technology and Culture". *The First Reinforced-Concrete Skyscraper: The Ingalls Building in Cincinnati and Its Place in Structural History*. **9** (1). doi:10.2307/3102041. JSTOR 3102041.
4. Richard W. S (1995). "History of Concrete" (PDF). The Aberdeen Group. Retrieved 25 April 2015.
5. W. Morgan (1995). "Reinforced Concrete". *The Elements of Structure*. John F. Claydon (Civil Engineer). Retrieved 25 April 2015.
6. Department of Civil Engineering (2015). "History of Concrete Building Construction". University of Memphis. Retrieved 25 April 2015.
7. Mörsch, Emil (1909). *Concrete-steel Construction: (Der Eisenbetonbau)*. The Engineering News Publishing Company. pp. 204–210.
8. Collins, Peter (1920–1981). *Concrete: The Vision of a New Architecture*. McGill-Queen's University Press. pp. 58–60. ISBN 0-7735-2564-5.
9. Mörsch, Emil (1909). *Concrete-steel Construction: (Der Eisenbetonbau)*. The Engineering News Publishing Company. pp. 204–205.
10. Mars, Roman. "Episode 81: Rebar and the Alvord Lake Bridge". *99% Invisible*. Retrieved 6 August 2014.
11. Collins, Peter (1920–1981). *Concrete: The Vision of a New Architecture*. McGill-Queen's University Press. pp. 61–64. ISBN 0-7735-2564-5.
12. "CIVL 1101". Retrieved 23 December 2016.
13. "Emerging Corrosion Control Technologies for Repair and Rehabilitation of Concrete Structures (page 1)". Retrieved 23 December 2016.
14. article "Concrete Inhomogeneity of Vertical Cast-In-Situ Elements In Frame-Type Buildings" (<http://www.concreteresearch.org/PDFsandsoon/Inhomog%20Denver.pdf>).
15. "Effect of zinc phosphate chemical conversion coating on corrosion behaviour of mild steel in alkaline medium: protection of rebars in reinforced concrete" *Sci. Technol. Adv. Mater.* **9** (2008) 045009 (free download (<http://www.iop.org/EJ/abstract/1468-6996/9/4/045009>))
16. Nilson, Darwin , Dolan. *Design of Concrete Structures*. the MacGraw-Hill Education, 2003. p. 80-90.
17. <http://121.183.206.200:8080/proto.board/abstractArticleContentView?page=article&journal=sem&volume=53&num=4&ordernum=7&site=korsc>
18. Kabir, Sadeghi, (15 September 2011). "Energy based structural damage index based on nonlinear numerical simulation of structures subjected to oriented lateral cyclic loading". **9** (3). Retrieved 23 December 2016.
19. Janowski, A.; Nagrodzka-Godycka, K.; Szulwic, J.; Ziółkowski, P. (Institute of Research Engineers and Doctors USA). "Modes of Failure Analysis in Reinforced Concrete Beam Using Laser Scanning and

- Synchro-Photogrammetry". *Proc. of the Second Intl. Conf. on Advances In Civil, Structural and Environmental Engineering - ACSEE 2014*. doi:10.13140/RG.2.1.3044.2888/1. Retrieved 2016-02-14. Check date values in: |date= (help)
20. "h2g2 - Concrete Cancer". BBC. Retrieved 2009-10-14.
  21. 2006 alert for defective cement (<https://web.archive.org/web/20061029112122/http://www.cementindustry.co.uk/main.asp?page=272>) at the Wayback Machine (archived October 29, 2006)
  22. "HAC". Web.archive.org. Archived from the original on 2005-09-11. Retrieved 2009-10-14.
  23. BS EN 1169:1999 Precast concrete products. General rules for factory production control of glass-fibre reinforced cement. British Standards Institute: <http://shop.bsigroup.com/> ISBN 0-580-32052-9
  24. BS EN 1170-5:1998 Precast concrete products. Test method for glass-fibre reinforced cement. <http://shop.bsigroup.com/> ISBN 0-580-29202-9
  25. Arthur W. Darby (2003), "*Unknown title*" (PDF), *www.tunnels.mottmac.com*, p. 645 |chapter= ignored (help)

## Further reading

- Threlfall A., *et al.* *Reynolds's Reinforced Concrete Designer's Handbook – 11th ed.* ISBN 978-0-419-25830-8.
- Newby F., *Early Reinforced Concrete*, Ashgate Variorum, 2001, ISBN 978-0-86078-760-0.
- Kim, S., Surek, J and J. Baker-Jarvis. "Electromagnetic Metrology on Concrete and Corrosion." (<http://nvlpubs.nist.gov/nistpubs/jres/116/3/V116.N03.A02.pdf>) *Journal of Research of the National Institute of Standards and Technology*, Vol. 116, No. 3 (May–June 2011): 655-669.
- Daniel R., *Formwork UK "Concrete frame structures."* (<http://formworkuk.co.uk/2016/concrete-frame-structures/>).

## External links

- The Concrete Reinforcing Steel Institute (CRSI) is a national trade association that stands as the authoritative resource for information related to steel reinforced concrete construction. (<http://www.crsi.org>)
- Concrete Research: <http://www.concreteresearch.org> (<http://www.concreteresearch.org>)
- Timeline of concrete (<http://www.auburn.edu/academic/architecture/bsc/classes/bsc314/timeline/timeline.htm>)

Retrieved from "[https://en.wikipedia.org/w/index.php?title=Reinforced\\_concrete&oldid=756356265](https://en.wikipedia.org/w/index.php?title=Reinforced_concrete&oldid=756356265)"

Categories: Concrete buildings and structures | Reinforced concrete | Structural engineering

- 
- This page was last modified on 23 December 2016, at 17:50.
  - Text is available under the Creative Commons Attribution-ShareAlike License; additional terms may apply. By using this site, you agree to the Terms of Use and Privacy Policy. Wikipedia® is a registered trademark of the Wikimedia Foundation, Inc., a non-profit organization.